




- Thermoplastic self-extinguishing frame
- Power supply 12/24 Vdc
- Steady or flashing light
- High sound power buzzer
- LED backlighting

Series 5000

Housing material	Self-extinguishing white thermoplastic
Buzzer material	Self-extinguishing polycarbonate, transparent
Type of connection	Terminals
Operating temperature	-10°C to +50°C
Protection rating	IP40
Buzzer characteristics	Sound pressure @ 1m: 100 dB @ 12V - 108 dB @ 24V Frequency: 3200 Hz Pulsating sound: 0,25 s ON - 0,25 s OFF

Dimensions

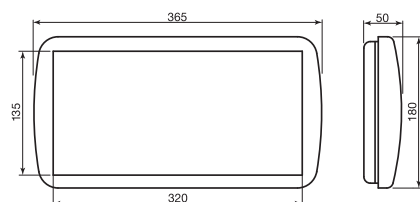

Order codes

Code	Nominal voltage	Nominal current	Lamp	Flash frequency	Package weight
O-5055-SS	10.8 Vdc to 28 Vdc	105 mA @ 24 Vdc	High brightness LED	steady light or 60/min	0.70 Kg
O-5055-CSA	same as O-5055-SS - supplied with label sticker CSA08660 (ALLARME INCENDIO)				
5055-SP	same as O-5055-SS - supplied with 7 label stickers: CSA08677, CSA08679, CSA08682, CSA08683, CSA08689C, CSA08689A, CSA08689B				

Accessories: Label stickers for series 5000

ITALIAN	ALLARME INCENDIO CSA08660	ALLARME GAS CSA08661	ALLARME CSA08662	SPEGNIMENTO IN CORSO CSA08663	ABBANDONARE IL LOCALE CSA08664	EVACUARE IL LOCALE SPEGNIMENTO AUTOMATICO IMMINENTE CSA08659	
FRENCH	ALLARME INCENDIE CSA08670	EVACUATION IMMEDIATE CSA08671	ENTREE INTERDITE CSA08672				
ENGLISH	HAZARDOUS AREA CSA08665	EXTINGUISHING IN PROGRESS CSA08666	ALARM CSA08667	FIRE ALARM CSA08668	DO NOT ENTER CSA08669	DOOR CLOSING CSA0866A	
GERMAN	EINTRITT VERBOTEN CSA08673	FEUEERALARM CSA08674	BETRETEN VERBOTEN GASALARME CSA08676				
SPANISH	EXTINCION DISPARADA CSA08677	MONOXIDO DE CARBONO CSA08678	GAS DISPARADO CSA08679	FUEGO CSA08682	INCENDIO CSA08684	ATMOSFERA PELIGROSA CSA08689A	
PORTUGUESE	EXTINCAO ACTUADA CSA08688	ATMOSFERA PERIGOSA CSA08689	ATMOSFERA SATURADA-CO CSA08689C	ATMOSFERA EXPLOSIVA CSA08689B	FOGO CSA08683		
MISCELLANEOUS	FIRE INCENDIO CSA08653	NON ENTRARE DO NOT ENTER CSA08643	EVACUAZIONE EVACUATION CSA08642	ALLARME INCENDIO FEUEERALARM CSA08621-1	VIETATO FUMARE CSA08645	VIETATO FUMARE PER IL GUASTO ALL'IMPIANTO DI VENTILAZIONE CSA08646	AREA PER FUMATORI CSA08647

Series 5000

IP40 optical/acoustic panel

Optical/acoustic sign boards, suitable for all types of risk conditions such as fire, flooding, gas leaks, etc., whenever visual and acoustic information are needed.

The notably elegant and pleasing design is suited to installations in hotels, shops, shopping centres, cinemas. 5000 series alarm panels are available with a high visibility LED lighting system and high sound pressure buzzers.

O-5055-CSA comes with the label sticker "ALLARME INCENDIO", O-5055-SS comes without label sticker; spare label stickers in various languages, as per table below, can be purchased separately.

5000 series illuminated panels do not replace optical warning devices within fire detection units.