

DS-KAD40 IP intercom distributor



- Having the ability to connect up to 400 third-party handsets
- Support CVBS output via BNC connector
- Support enabling/disabling intercom function for each flat


▪ Specification

Device interfaces	
Network interface	2*10/100Mbps Self-adaption
DIP switch	2-bit
Two-Wire interface	20
Video output	1
Power interface	1
BNC	1
Debugging port	1
General	
Weight	Without package: 444 g (0.98 lb),With package: 659g (1.45 lb)
Power supply	12 VDC, 0.32 A
Language	English, Russian, Kazakh, Uzbek, Ukrainian, Estonian, Lithuanian, Latvian, Czech
Working temperature	-35 °C to 55 °C (-31 °F to 131 °F)
Working humidity	10% to 90% (no condensing)
Dimension (W × H × D)	186.41mm × 94.7mm × 24mm (7.34" × 3.73" ×0.95")
Installation	Wall mounting DIN rail mounting

▪ Available Model

DS-KAD40

▪ Dimension

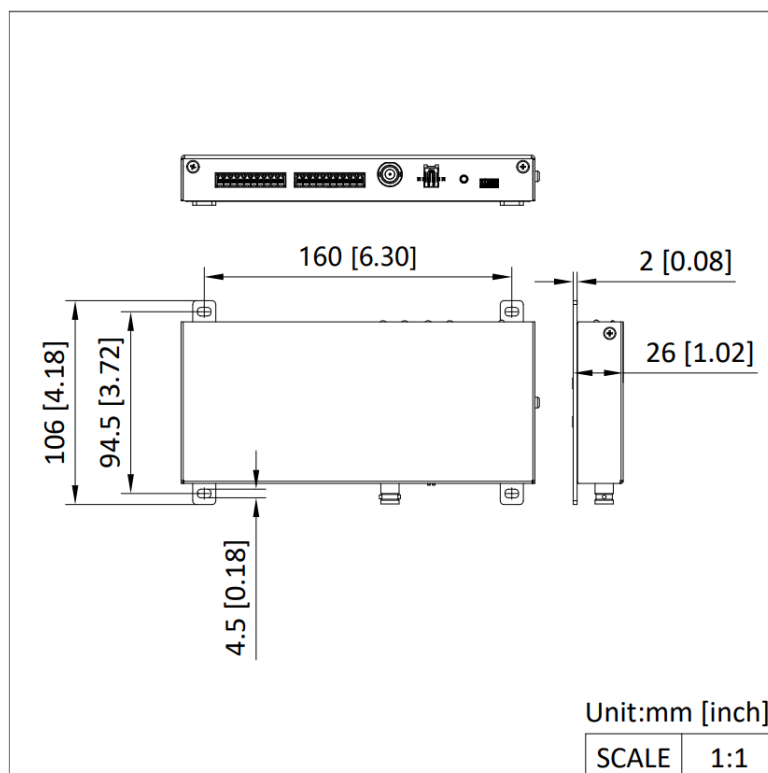

▪ **Accessory**

▪ **Optional**

DS-KD9203-E6 Facial Recognition Door station	DS-KD9203-FE6 Facial Recognition Door station	DS-KD9203-TE6 Facial Recognition Door station	DS-KD9203-FTE6 Facial Recognition Door station	DS-KD9203-ME6 Facial Recognition Door station
				
DS-KD9203-MFE6 Facial Recognition Door station	DS-KD9203-MTE6 Facial Recognition Door station	DS-KD9203-MFTE6 Facial Recognition Door station		
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq