



Key Feature

- Aluminum frame with anodizing processing and ultra thin fuselage
- 2.5D curved 10.1-inch IPS touch screen
- Higher protection level, IP65 & IK07
- Multiple authentication ways
- Optional sub module

Specification

System parameters	
Operating system	Android 7.1
ROM	4 GB
RAM	2 GB
CPU	Embedded Processor
Display parameters	
Screen size	10.1-inch
Operation method	Touch screen
Type	Colorful IPS
Resolution	1280 × 800
Video parameters	
Supplement light	Low illumination, IR supplement lights
Video standard	H.264
Lens	1
FOV	Horizontal: 88° , Vertical: 44°
WDR	Support
Resolution	2 MP

Audio parameters	
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Fingerprint capacity	/
User capacity	20000
Card capacity	100000
Face capacity	10000
Linked indoor station capacity	500
Event capacity	/
Sub door station capacity	16
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	10/100/1000 Mbps self-adaptive Ethernet
Wi-Fi	/
Bluetooth	/
3G/4G	/


Authentication	
Card reading frequency	13.56 MHz
Device interfaces	
Alarm input	4 (2 exit buttons and 2 door contacts by default)
TAMPER	1
Network interface	2 RJ45 (1 reserved)
Exit button	2 (1 for lock control and 1 for DS-K2M060 relay control)
RS-485	2 (1 for Hikvision's card reader or elevator controller and 1 for DS-K2M060 by default)
USB	2 for internal use only
Wiegand	/
TF card	1 (reserved)
Alarm output	2 (reserved)
Lock control	2 (1 relay and 1 RS-485 to control the DS-K2M060)
Door contact input	1
Power interface	1
General	
Button	/
Installation	Surface mounting & flush mounting
Indicator	0
Weight	1.265 kg
Protective level	IP65 & IK07
Working temperature	-30° C to 60° C (-22° F to 140° F)
Working humidity	10% to 90%
Dimensions	271 mm × 159.2 mm × 26.5 mm (10.7" × 6.3" × 1")
Battery	/
Power supply	12 VDC, 2 A
Application environment	Outdoor
Power consumption	≤ 18 W

Language	English, French, Portuguese, Brazilian Portuguese, Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovakia, Hebrew, Swedish, Finnish, TraChinese, Mongolian, HongKongTraChinese
----------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Available Model

DS-KD9633-E6

Dimension

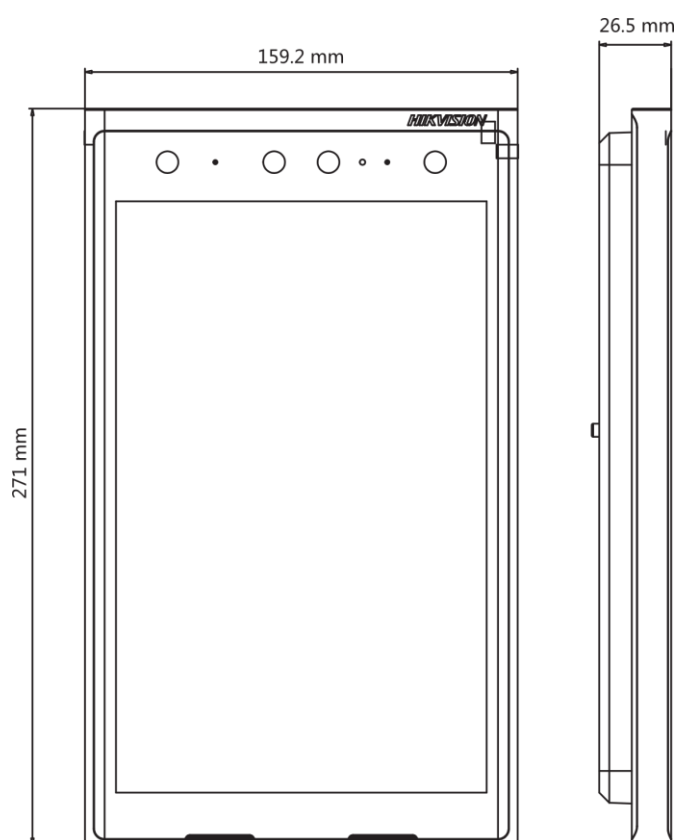

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

