


Quantec Display Interface Part No. QT6155

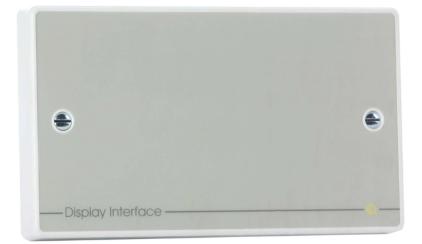

Overview

- Allows a QT608CD1S large corridor display to be connected to Quantec via an RS232 serial interface lead (supplied with the large display).
- Mounts on a standard UK 20mm double gang flush or surface back box.
- The data connection to the large display is monitored. If this is disconnected or the large display is switched off then the QT615S appears as "Missing" on the Quantec controller

(m) 2

More Information

Technical Specifications

Power requirements	Nominal 24V DC (from Quantec Controller/Network)
Quiescent current	Less than 5mA.
Indicators	None.
Controls	None. If controls are required use a QT608C display.
Connections	Net +: Net -; RS232 serial port.
Product dimensions (mm)	147 W x 86 H x 23 D mm. Mount on a 35mm deep double gang back box.
Construction & finish	Plastic.



 T
 01942 322744
 E
 sales@c-tec.co.uk

 F
 01942 829867
 W
 www.c-tec.com

C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom



IP Rating IP41. Weight 260g. Operating conditions/temperature -5°C to +40°C. Max relative humidity: 95%.



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom



